



# ZyWALL VPN50/100/300/1000

## VPN Firewall

### Advanced VPN Firewall with an option to run SD-WAN

ZyWALL VPN Series Firewall, when as a standalone gateway, features many robust VPN functionalities to empower your business network with better connectivity and higher security, so your daily operations including all information flow between HQ and branches become faster, easier and safer to achieve maximum business performance.

Except serving as a standalone gateway, ZyWALL VPN Series can also be cloud-managed by Nebula SD-WAN Orchestrator, a cost-effective solution that optimizes WAN service quality, featuring zero-touch deployment, centralized monitoring, great agility, and higher throughput with lowered cost.

### Benefits

#### Your secure connection to the world

The ZyWALL VPN Series integrated innovations connects your cross-group network while providing you the world's best central management and security features.



Diverse VPN solution (IPSec/SSL/L2TP over IPSec) for better security



Nebula SD-WAN cloud management makes it easy to manage multiple firewalls



Content Filtering and Geo Enforcer protect your network from web threats



AP Controller technology allows you to manage up to 1,032 APs



Same security across networks with 2FA logins, NVGRE over IPSec for a more safer tunnel protection



## Secure your cross-group network

The ZyWALL VPN Series is equipped with comprehensive VPN connection types including SSL & IPSec VPN, offering businesses secured remote connections. IPSec VPN hardware engine for high efficiency VPN tunnel and VPN load balance/failover with IKEv2 that ensures strong VPN reliability and security for business. Reliance on cloud platforms for mission-critical services are growing, VPN Series is validated by Microsoft Azure and AWS for SMB convenience by using a combination of on-site and cloud-based infrastructure with hybrid networks.

SD-WAN provides a platform for cloud management, get the benefit of a centralized management for site to site connectivity while having the ability to control and monitor remotely. VPN Series also provides a standalone gateway mode, if you request more robust VPN functionalities.



## Same security across networks

Whether it is a wired or wireless, the ZyWALL VPN series enhanced with secure WiFi integration to ensure the same network controls between firewalls and remote access points which can be applied to corporate headquarters, branch offices, homes or other workplaces. The ZyWALL VPN series adopts the authorization with two-factor authentication (2FA) logins. The VPN series also supports a more safer tunnel protection with NVGRE over IPSec, easily extend your remote working experience at any working environments as you were in the office anywhere, anytime.



## Protect your business efficiently

The ZyWALL VPN Series provides all the latest advanced technologies including Content Filtering and Geo Enforcer to better protect your network from web threats.

### • Content Filtering

ZyWALL VPN Series delivers enhanced web filtering functionality and security through its powerful combination of reputation and category-based filtering. It runs dynamic categorization, analyzes the content of a previously unknown website and determines if it belongs to an undesirable category such as gambling, pornography, games, and many others. It also supports CTIRU (Counter-Terrorism Internet Referral Unit) to restrict access to any online terrorism material.

### • Geo Enforcer

Monitors traffic and analyzes log data of IP address locations while denying access from unnecessary or potentially dangerous traffic.

## Comprehensive connectivity


The ZyWALL VPN Series combines AP Controller technology enabling users to manage up to 1032 APs from a centralized user interface. Businesses can deploy or expand a managed Wi-Fi network with minimal effort.

## Non-stop service

VPN features multi-WAN load balancing and failover safety with USB 3G/4G support as a backup WAN, providing a non-stop internet connection service.





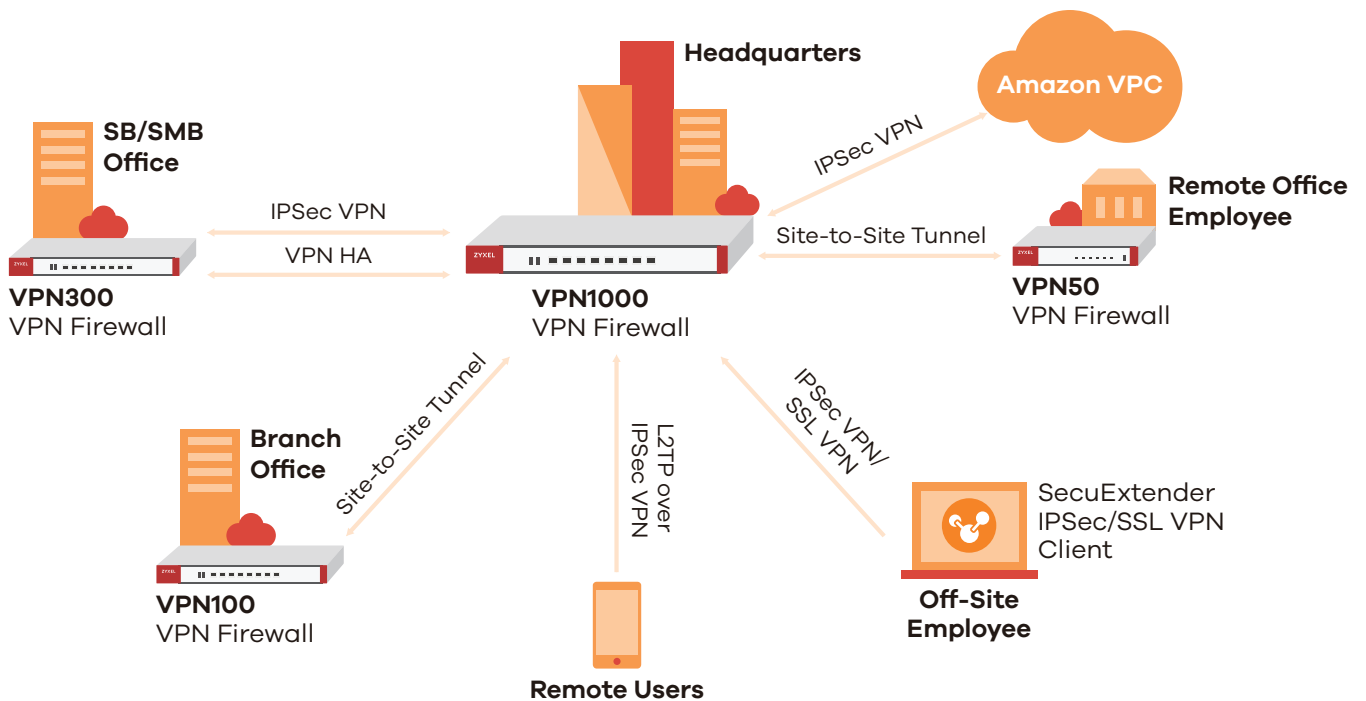

## Application Diagram





# Specifications

Model	ZyWALL VPN50	ZyWALL VPN100	ZyWALL VPN300	ZyWALL VPN1000
<b>Product photo</b>				
<b>Hardware Specifications</b>				
<b>Interfaces</b>	4 x LAN/DMZ, 1 x WAN, 1 x SFP	4 x LAN/DMZ, 2 x WAN, 1 x SFP	7x GbE (Configurable), 1x SFP	12x GbE (configurable), 2x SFP (configurable)
<b>USB3.0 ports</b>	1	2	2	2
<b>Console port</b>	Yes (RJ-45)	Yes (DB9)	Yes (DB9)	Yes (DB9)
<b>Rack-mountable</b>	-	Yes	Yes	Yes
<b>System Capacity &amp; Performance*1</b>				
<b>SPI firewall throughput (Mbps)*2</b>	800	2,000	2,600	8,000
<b>VPN throughput (Mbps)*3</b>	150	500	1,000	1,500
<b>VPN IMIX Throughput (Mbps)*3</b>	40	160	240	600
<b>Max. TCP concurrent sessions*4</b>	400,000	800,000	2,000,000	3,000,000
<b>Max. concurrent IPSec VPN tunnels*5</b>	50	100	300	1,000
<b>Recommended gateway-to-gateway IPSec VPN tunnels</b>	20	50	150	300
<b>Concurrent SSL VPN users (default/max.)*6</b>	10/50	30/200	50/300	250/500
<b>VLAN interface</b>	8	16	64	128
<b>Concurrent devices logins (default/max.)*6*7</b>	64	200/300	500/800	800/4000
<b>Speed Test Performance</b>				
<b>SPI firewall throughput*11 (Mbps)</b>	620	900	930	930
<b>WLAN Management</b>				
<b>Default Number of Managed AP</b>	8	8	8	8
<b>Secure WiFi Service*6</b>	Yes	Yes	Yes	Yes
<b>Maximum Number of Tunnel-Mode AP</b>	10	18	66	258
<b>Maximum Number of Managed AP</b>	40	72	264	1032
<b>Recommend max. AP in 1 AP Group</b>	20	60	200	300
<b>Security Service</b>				
<b>Content filtering *6*8</b>	Yes, (bundle 1 year License)	Yes, (bundle 1 year License)	Yes, (bundle 1 year License)	Yes, (bundle 1 year License)
<b>Geo Enforcer*6</b>	Yes, (bundle 1 year License)	Yes, (bundle 1 year License)	Yes, (bundle 1 year License)	Yes, (bundle 1 year License)
<b>Key Features</b>				
<b>DPI Firewall</b>	Yes	Yes	Yes	Yes
<b>VPN</b>	IKEv2, IPSec, SSL, L2TP/IPSec	IKEv2, IPSec, SSL, L2TP/IPSec	IKEv2, IPSec, SSL, L2TP/IPSec	IKEv2, IPSec, SSL, L2TP/IPSec
<b>SSL (HTTPS) inspection</b>	Yes (SP350E)/10	Yes (SP350E)/10	Yes (SP350E)/10	Yes (SP350E)/10
<b>Amazon/Azure VPC</b>	-	Yes	Yes	Yes
<b>EZ Mode</b>	Yes	-	-	-
<b>Hotspot Management *6</b>	Yes	Yes	Yes	Yes
<b>Ticket printer support*9 / Support Q'ty (max.)</b>	Yes (SP350E) / 10	Yes (SP350E) / 10	Yes (SP350E) / 10	Yes (SP350E) / 10
<b>Microsoft Azure</b>	Yes	Yes	Yes	Yes
<b>Amazon VPC</b>	Yes	Yes	Yes	Yes
<b>Device HA Pro*10</b>	Yes	Yes	Yes	Yes

Model		ZyWALL VPN50	ZyWALL VPN100	ZyWALL VPN300	ZyWALL VPN1000
<b>Power Requirements</b>					
<b>Power input</b>		12 V DC, 2.0 A max.	12 V DC, 2.5 A max.	12 V DC, 4.17 A max.	100-240 V AC, 50/60 Hz, 2.5 A max.
<b>Max. power consumption (watt)</b>		12	13.3	24.1	46.0
<b>Heat dissipation (BTU/hr)</b>		40.92	45.38	82.23	120.10
<b>Physical Specifications</b>					
<b>Item</b>	<b>Dimensions (WxDxH) (mm/in.)</b>	216 x 143 x 33/ 8.50 x 5.63 x 1.30	272 x 187 x 36/ 10.7 x 7.36 x 1.42	300 x 188 x 44/ 16.93 x 7.4 x 1.73	430 x 250 x 44/ 16.93 x 9.84 x 1.73
	<b>Weight (kg/lb.)</b>	0.88/1.94	1.4/3.09	1.65/3.64	3.3/7.28
<b>Packing</b>	<b>Dimensions (WxDxH) (mm/in.)</b>	276 x 185 x 98/ 10.87 x 7.28 x 3.86	427 x 247 x 73/ 16.81 x 9.72 x 2.87	351 x 152 x 245/ 13.82 x 5.98 x 9.65	519 x 392 x 163/ 20.43 x 15.43 x 6.42
	<b>Weight (kg/lb.)</b>	1.41/3.11	2.23 (W/O bracket) 2.42 (W/ bracket)	2.83/6.24	4.8/10.58
<b>Included accessories</b>		<ul style="list-style-type: none"> <li>• Power adapter</li> <li>• RJ-45 - RS-232 cable for console connection</li> </ul>	<ul style="list-style-type: none"> <li>• Power adapter</li> <li>• Rack mounting kit</li> </ul>	<ul style="list-style-type: none"> <li>• Power adapter</li> <li>• Power cord</li> <li>• Rack mounting kit</li> </ul>	<ul style="list-style-type: none"> <li>• Power cord</li> <li>• Rack mounting kit</li> </ul>
<b>Environmental Specifications</b>					
<b>Operating environment</b>	<b>Temperature</b>	0°C to 40°C/ 32°F to 104°F	0°C to 40°C/ 32°F to 104°F	0°C to 40°C/ 32°F to 104°F	0°C to 40°C/ 32°F to 104°F
	<b>Humidity</b>	10% to 90% (non-condensing)	10% to 90% (non-condensing)	10% to 90% (non-condensing)	10% to 90% (non-condensing)
<b>Storage environment</b>	<b>Temperature</b>	-30°C to 70°C/ -22°F to 158°F	-30°C to 70°C/ -22°F to 158°F	-30°C to 70°C/ -22°F to 158°F	-30°C to 70°C/ -22°F to 158°F
	<b>Humidity</b>	10% to 90% (non-condensing)	10% to 90% (non-condensing)	10% to 90% (non-condensing)	10% to 90% (non-condensing)
<b>MTBF (hr)</b>		655,130	529,688.2	529,688.2	444,930
<b>Certifications</b>					
<b>EMC</b>		FCC Part 15 (Class B), IC, CE EMC (Class B), RCM, BSMI	FCC Part 15 (Class B), CE EMC (Class B), C-Tick (Class B), BSMI	FCC Part 15 (Class A), CE EMC (Class A), C-Tick (Class A), BSMI	FCC Part 15 (Class A), CE EMC (Class A), C-Tick (Class A), BSMI
<b>Safety</b>		BSMI, UL	LVD (EN60950-1), BSMI	LVD (EN60950-1), BSMI	LVD (EN60950-1), BSMI

Note:

\*: This matrix with the latest firmware version.

\*1: Actual performance may vary depending on network conditions and activated applications.

\*2: Maximum throughput based on RFC 2544 (1,518-byte UDP packets).

\*3: VPN throughput measured based on RFC 2544 (1,424-byte UDP packets); IMIX: UDP throughput based on a combination of 64 byte, 512 byte and 1424 byte packet sizes.

\*4: Maximum sessions measured using the industry standard IXIA IxLoad testing tool.

\*5: Including Gateway-to-Gateway and Client-to-Gateway.

\*6: With Zyxel service license to enable or extend the feature capacity.

\*7: This is the recommend maximum number of concurrent logged-in devices.

\*8: SafeSearch function in Content Filtering need to enable SSL inspection firstly and not for small business models.

\*9: With Hotspot Management license support.

\*10: ZyWALL VPN100 or above supports Device HA Pro once registered.

\*11: The Speedtest result is conducted with 1Gbps WAN link in real world and it is subject to fluctuate due to quality of the ISP link.

# Software Features

## Security Service

### Firewall

- ICSA-certified corporate firewall
- Routing and transparent (bridge) modes
- Stateful packet inspection
- User-aware policy enforcement
- SIP/H.323 NAT traversal
- ALG support for customized ports
- Protocol anomaly detection and protection
- Traffic anomaly detection and protection
- Flooding detection and protection
- DoS/DDoS protection

### Unified Security Policy

- Unified policy management interface
- Support Content Filtering, Application Patrol, firewall(ACL/SSL)
- Policy criteria: zone,source anddestination IP address, user, time

### Content Filtering

- HTTPs domain filtering
- SafeSearch support
- Whitelist websites enforcement
- URL blacklist and whitelist with keyword blocking
- Customizable warning messages and redirect URL
- Customizable Content Filtering block page
- URL categories increased to 111
- CTIRU (Counter-Terrorism Internet Referral Unit) support

### Geo Enforcer

- Geo IP blocking
- Geographical visibility on traffics statistics and logs
- IPv6 address support

## VPN

### IPSec VPN

- Key management: IKEv1 (x-auth, mode-config), IKEv2 (EAP, configuration payload)
- Encryption: DES, 3DES, AES (256-bit)
- Authentication: MD5, SHA1, SHA2 (512-bit)
- Perfect forward secrecy (DH groups) support 1, 2, 5, 14, 15-18, 20-21
- PSK and PKI (X.509) certificate support

- IPSec NAT traversal (NAT-T)
- Dead Peer Detection (DPD) and relay detection
- VPN concentrator
- Route-based VPN Tunnel Interface (VTI)
- VPN high availability (Failover, LB)
- GRE over IPSec
- NAT over IPSec
- L2TP over IPSec
- Zyxel VPN client provisioning
- Support iOS L2TP/IKE/IKEv2 VPN client provision

### SSL VPN

- Supports Windows and Mac OS X
- Supports full tunnel mode
- Supports 2-Factor authentication

## Networking

### WLAN Management

- Supports AP Controller (APC) version 3.60
- 802.11ax Wi-Fi 6 AP and WPA3 support
- 802.11k/v/r support
- Wireless L2 isolation
- Supports auto AP FW update
- Scheduled WiFi service
- Dynamic Channel Selection (DCS)
- Client steering for 5 GHz priority and sticky client prevention
- Auto healing
- Customizable captive portal page
- WiFi Multimedia (WMM) wireless QoS
- CAPWAP discovery protocol
- Multiple SSID with VLAN
- Supports ZyMesh
- Support AP forward compatibility
- Rogue AP Detection

### Mobile Broadband

- WAN connection failover via 3G and 4G\* USB modems
- Auto fallback when primary WAN recovers

### IPv6 Support

- Dual stack
- IPv4 tunneling (6rd and 6to4 transition tunnel)
- SLAAC, static IP address
- DNS, DHCPv6 server/client
- Static/Policy route
- IPSec (IKEv2 6in6, 4in6, 6in4)

## Connection

- Routing mode, bridge mode and hybrid mode
- Ethernet and PPPoE
- NAT and PAT
- NAT Virtual Server Load Balancing
- VLAN tagging (802.1Q)
- Virtual interface (alias interface)
- Policy-based routing (user-aware)
- Policy-based NAT (SNAT)
- GRE
- Dynamic routing (RIPv1/v2 and OSPF, BGP)
- DHCP client/server/relay
- Dynamic DNS support
- WAN trunk for more than 2 ports
- Per host session limit
- Guaranteed bandwidth
- Maximum bandwidth
- Priority-bandwidth utilization
- Bandwidth limit per user
- Bandwidth limit per IP
- Bandwidth management by application
- Link Aggregation support\*1

## Management

### Authentication

- Local user database
- External user database: Microsoft Windows Active Directory, RADIUS, LDAP
- IEEE 802.1x authentication
- Captive portal Web authentication
- XAUTH, IKEv2 with EAP VPN authentication
- IP-MAC address binding
- SSO (Single Sign-On) support
- Supports 2-factor authentication with Google Authenticator as the second factor for administrator account

### System Management

- Role-based administration
- Multi-lingual Web GUI (HTTPS and HTTP)
- Command line interface (console, web console, SSH and telnet)
- SNMP v1, v2c, v3
- System configuration rollback
- Configuration auto backup
- Firmware upgrade via FTP, FTP-TLS and Web GUI

- New firmware notify and auto upgrade
- Dual firmware images
- Cloud CNM SecuManager

#### Logging and Monitoring

- Comprehensive local logging
- Syslog (to up to 4 servers)
- Email alerts (to up to 2 servers)
- Real-time traffic monitoring
- Built-in daily report

#### Zyxel One Network

- ZON Utility:
  - IP configuration
  - Web GUI access
  - Firmware upgrade
  - Password configuration
- Smart Connect:
  - Location and System Name update
  - Discover neighboring devices
  - One-click remote management access to the neighboring Zyxel devices

#### Hotspot Management

- Integrated account generator, Web based authentication portal and billing system
- Supports external RADIUS servers
- Per account bandwidth management
- User agreement login
- SP350E Service Gateway Printer enables oneclick account and billing generation
- Built-in billing system:
  - Time-to-finish accounting mode
  - Accumulation accounting mode
- Supports PayPal online payment
- Marketing tool:
  - Advertisement link
  - Walled garden
  - Portal page
- Billing Replenish

#### Support

- Nebula SD-WAN (<https://www.zyxel.com/sd-wan>)
- Zyxel Support (<https://support.zyxel.eu/hc/en-us>)
- Zyxel Biz Forum (<https://businessforum.zyxel.com/categories/security>)

\*: For specific models supporting the 3G and 4G dongles on the list, please refer to the Zyxel product page at 3G dongle document

\*1: Supported models VPN300/1000

## Licenses

### Security

Product	SD-WAN Pack	Content Filtering	Geo Enforcer
ZyWALL VPN50	1 year/1 month	1 year/2 years	1 year
ZyWALL VPN100	1 year/1 month	1 year/2 years	1 year
ZyWALL VPN300	1 year/1 month	1 year/2 years	1 year
ZyWALL VPN1000	1 year/1 month	1 year/2 years	1 year

Note: Support Content Filtering and Geo Enforcer 1 year free license.

### VPN Service

Product	SSL VPN Tunnels	SecuExtender SSL VPN Client*	SecuExtender IPSec VPN Client
ZyWALL VPN50	Add 5/10 tunnels	Add 1/5/10 clients	For 1/5/10/50 clients
ZyWALL VPN100	Add 5/10/50 tunnels	Add 1/5/10 clients	For 1/5/10/50 clients
ZyWALL VPN300	Add 5/10/50 tunnels	Add 1/5/10 clients	For 1/5/10/50 clients
ZyWALL VPN1000	Add 5/10/50 tunnels	Add 1/5/10 clients	For 1/5/10/50 clients

\*: Support OS: MAC OS 10.7 or later

### Connectivity Solution

Product	Managed APs	Concurrent Device Upgrade	Hotspot Management
ZyWALL VPN50	Add 2/4/8 APs	-	1 year/One-Time
ZyWALL VPN100	Add 2/4/8/64 APs	Add 100 nodes	1 year/One-Time
ZyWALL VPN300	Add 2/4/8/64 APs	Add 100/300 nodes	1 year/One-Time
ZyWALL VPN1000	Add 2/4/8/64 APs	Add 100/300/1000 nodes	1 year/One-Time

## Access Point Compatibility List

### Secure Tunnel for Remote AP

Functions	Remote AP	Number of Tunnel Mode AP	Supported Remote AP
<b>ATP</b>	ATP100(W)	6	<ul style="list-style-type: none"> <li>• WAX650S</li> <li>• WAX610D</li> <li>• WAX510D</li> <li>• WAC500</li> <li>• WAC500H</li> </ul>
	ATP200	10	
	ATP500	18	
	ATP700	66	
	ATP800	130	
<b>USG FLEX</b>	USG FLEX100(W)	6	
	USG FLEX200	10	
	USG FLEX500	18	
	USG FLEX700	66	
<b>VPN</b>	VPN50	10	
	VPN100	18	
	VPN300	66	
	VPN1000	258	

### Managed AP Service

Product	Unified AP	Unified Pro AP	
<b>Models</b>	<ul style="list-style-type: none"> <li>• NWA5301-NJ</li> <li>• NWA5121-NI</li> <li>• NWA5123-AC HD</li> <li>• NWA5123-AC</li> <li>• NWA5123-NI</li> </ul>	<ul style="list-style-type: none"> <li>• WAC5302D-S</li> <li>• WAX510D</li> <li>• WAC5302D-Sv2*</li> <li>• WAC500*</li> <li>• WAC500H*</li> </ul>	<ul style="list-style-type: none"> <li>• WAC6103D-I</li> <li>• WAC6503D-S</li> <li>• WAC6502D-S</li> <li>• WAC6303D-S</li> <li>• WAC6553D-E</li> </ul>
<b>Functions</b>			
<b>Central management</b>	Yes	Yes	
<b>Auto provisioning</b>	Yes	Yes	
<b>Data forwarding</b>	Local bridge	Local bridge/Data tunnel	
<b>ZyMesh</b>	Yes	Yes	

\*: From APC3.0, commercial gateways supporting APC technology are able to recognize APs with FW release higher than APC3.0 as Forward Compatible APs. Resellers can introduce newly-available Zyxel APs with basic features supported without upgrading any new controller firmware.

## Accessories


### SecuExtender Software

Item	Description	Supported OS
<b>IPSec VPN Client*</b>	IPSec VPN client software for the ZyWALL and USG Series with Easy VPN for zero configuration remote access	<ul style="list-style-type: none"> <li>• Windows Server 2016</li> <li>• Windows Server 2019</li> <li>• Windows 7 (32/64-bit)</li> <li>• Windows 8 (32/64-bit)</li> <li>• Windows 10 (32/64-bit)</li> </ul>
<b>SSL VPN Client*</b>	Secured VPN connection between PC/MAC and ZyWALL Firewall	<ul style="list-style-type: none"> <li>• Windows 7 (32/64-bit)</li> <li>• Windows 8 (32/64-bit)</li> <li>• Windows 10 (32/64-bit)</li> <li>• MacOS 10.14</li> </ul>

\*: A 30-day trial version of IPSec VPN client and SSL VPN client for MAC OS can be downloaded from official Zyxel website. To continue using the application, please contact your regional sales representatives and purchase a commercial license for the application.



## Service Gateway Printer

Model	Feature	Supported Model			
<b>SP350E</b> 	<ul style="list-style-type: none"> <li>Buttons: 3</li> <li>Paper roll width: 58 (+0/-1) mm</li> <li>Interface: 10/100 Mbps RJ-45 port</li> <li>Power input: 12V DC, 5A max.</li> <li>Item dimensions (WxDxH): 176 x 111 x 114 mm (6.93" x 4.37" x 4.49")</li> <li>Item weight: 0.8 kg (1.76 lb.)</li> </ul>	<ul style="list-style-type: none"> <li>USG FLEX 200</li> <li>USG FLEX 500</li> <li>USG FLEX 700</li> </ul>	<ul style="list-style-type: none"> <li>VPN50</li> <li>VPN100</li> <li>VPN300</li> <li>VPN1000</li> </ul>	<ul style="list-style-type: none"> <li>USG60</li> <li>USG60W</li> <li>USG110</li> <li>USG210</li> <li>USG310</li> <li>USG1100</li> <li>USG1900</li> <li>USG2200 Series</li> </ul>	<ul style="list-style-type: none"> <li>ZyWALL110</li> <li>ZyWALL310</li> <li>ZyWALL1100</li> </ul>

Note: Hotspot management licenses required

## Transceivers (Optional)

Model	Speed	Connector	Wavelength	Max. Distance	Optical Fiber Type	DDMI
<b>SFP10G-SR*</b>	10-Gigabit SFP+	Duplex LC	850 nm	300m/ 328 yd	Multi Mode	Yes
<b>SFP10G-SR-E*</b>	10-Gigabit SFP+	LC	850 nm	300 m/ 328 yd	Multi Mode	Yes
<b>SFP10G-LR*</b>	10-Gigabit SFP+	Duplex LC	1310 nm	10 km/ 10936 yd	Single Mode	Yes
<b>SFP10G-LR-E*</b>	10-Gigabit SFP+	LC	1310 nm	10 km/ 10936 yd	Single Mode	Yes
<b>SFP-1000T</b>	Gigabit	RJ-45	-	100 m/ 109 yd	Multi Mode	-
<b>SFP-SX-D</b>	Gigabit	LC	850 nm	550 m/ 601 yd	Multi Mode	Yes
<b>SFP-SX-E</b>	Gigabit	LC	850 nm	550 m/ 601 yd	Multi Mode	Yes
<b>SFP-LX-10-D</b>	Gigabit	LC	1310 nm	10 km/ 10936 yd	Single Mode	Yes
<b>SFP-LX-10-E</b>	Gigabit	LC	1310 nm	10 km/ 10936 yd	Single Mode	Yes
<b>SFP-LHX1310-40-D</b>	Gigabit	LC	1310 nm	40 km/ 43744 yd	Single Mode	Yes
<b>SFP-ZX-80-D</b>	Gigabit	LC	1550 nm	80 km/ 87488 yd	Single Mode	Yes
<b>SFP-BX1310-10-D*1</b>	Gigabit	LC	1310 nm (TX) 1490 nm (RX)	10 km/ 10936 yd	Single Mode	Yes
<b>SFP-BX1310-E*1</b>	Gigabit	LC	1310 nm (TX) 1550 nm (RX)	20 km/ 21872 yd	Single Mode	Yes
<b>SFP-BX1490-10-D*1</b>	Gigabit	LC	1490 nm(TX) 1310 nm(RX)	10 km/ 10936 yd	Single Mode	Yes
<b>SFP-BX1550-E*1</b>	Gigabit	LC/SC	1550 nm (TX) 1310 nm (RX)	20 km/ 21872 yd	Single Mode	Yes

\*: Only USG2200 Series supports 10-Gigabit SFP+

\*1: SFP-BX1310-10-D & SFP-BX1490-10-D, SFP-BX1310-E & SFP-BX1550-E must be used in pairs.

For more product information, visit us on the web at [www.zyxel.com](http://www.zyxel.com)

Copyright © 2021 Zyxel and/or its affiliates. All rights reserved.  
All specifications are subject to change without notice.



11/06/21