

# ZYXEL



## VMG3925-B Series


### Dual-Band Wireless AC/N VDSL2 Combo WAN Gigabit Gateway

The Zyxel VMG3925-B Series Dual-Band Wireless AC/N VDSL2 Combo WAN Gigabit Gateway provides high-speed VDSL Internet access to meet the worldwide market requirements for multi-play services. Featuring the built-in 3x3 802.11ac WLAN that relieves to those troublesome wirings, the VMG3925-B Series brings extremely great WiFi user experience and coverage. Moreover, its user-oriented design also allows it to provide powerful functions while it comfortably meets the style of every customer.

#### Benefits

##### G.vector to optimize performance and CAPEX

The Zyxel VMG3925-B Series of Dual-Band Wireless AC/N VDSL2 Combo WAN Gigabit Gateway features Vectoring technology to eliminate cross-talk or interference among different VDSL lines. With the mechanism, Vectoring significantly increases the bit rates to compete with cable/fiber technology as well as to enlarge the service coverage without changing the current infrastructure – a way to save cost significantly comparing to Fiber-To-The-Home (FTTH) deployments. In the meantime, the CAPEX can also be optimized by the improved data rates and coverage without upgrading the existing equipment.

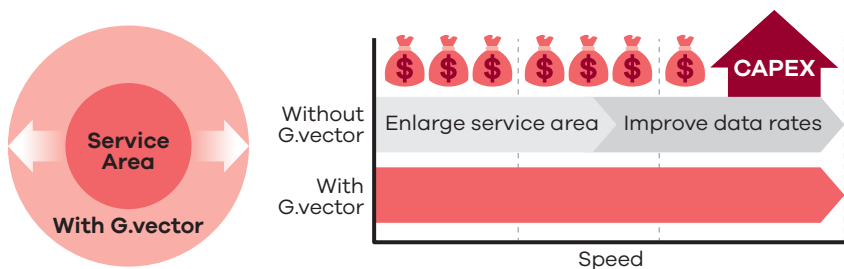

VDSL2 support up to profile 17a



VDSL2 vectoring for maximized service coverage



5 GHz 11ac (3x3) for smooth, optimized HD IPTV services everywhere



TR-069/TR-181 Issue-2 remote management



Combo WAN-in-a-box for optimized CAPEX in FTTH/VDSL2 deployments



Excellent routing and QoS capability to prioritize applications as needed




NAT, firewall with SPI and DoS for better security



Stand-alone or wall-mount

## Combo WAN for simplified ISP logistics and optimized CAPEX

With the Zyxel VMG3925-B Series, there's no need for service providers to invest on and replace CPEs at customer sites when customers migrate from ADSL2+ or VDSL2 to PON or 3G as all they need to do is to unplug the DSL line, and then plug an Ethernet cable to the Ethernet WAN port. The existing CPE VMG3925-B Series will be used to terminate the IP connections via the WAN interface. In most cases, users can still connect with the original CPE without replacing the unit due to the difference between physical interfaces.

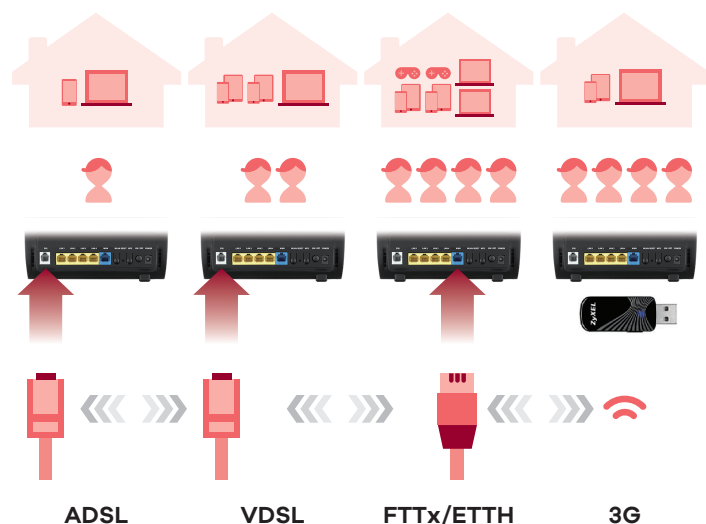


## Quality of Service (QoS) support

With the QoS features from Zyxel VMG3925-B Series, service providers can freely design their QoS policies and prioritize mission-critical services such as IPTV and VoIP based on their service plan offerings. This increases network efficiency and productivity that enable service providers to offer a real multi-play solution that meets the needs of residential users.




## 802.11ac technology for extreme performance and coverage

The Zyxel VMG3925-B Series features 802.11ac technology to provide the ultimate solution for both speed and coverage. With 802.11ac wireless data rates of up to 1.3 Gbps\*, the VMG3925-B Series provides stable, reliable wireless connections for high-speed data and multimedia usages. The 802.11ac technology empowered the device to eliminate dead zones and to extend coverage while retaining backward compatibility with any WiFi certified device.

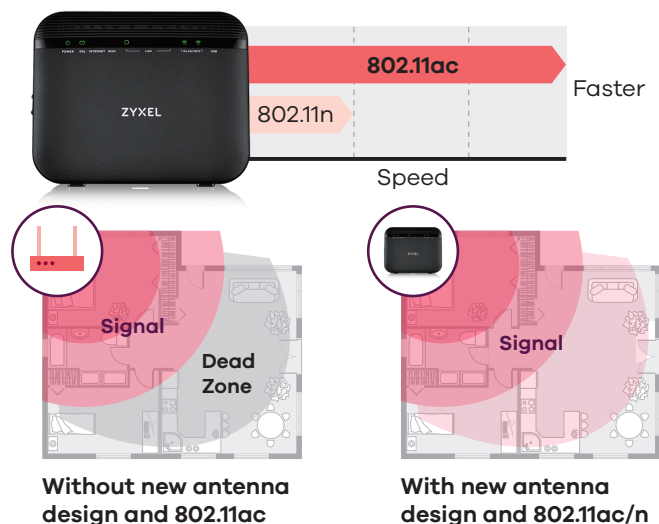

## TR-069 remote management

The Zyxel VMG3925-B Series incorporates the TR-069 standard management specifications for service providers to manage and configure client devices remotely without any end-user intervention. This feature offers a true "plug-and-play" experience while reducing deployment complexity to help saving operating and maintenance costs for service providers.

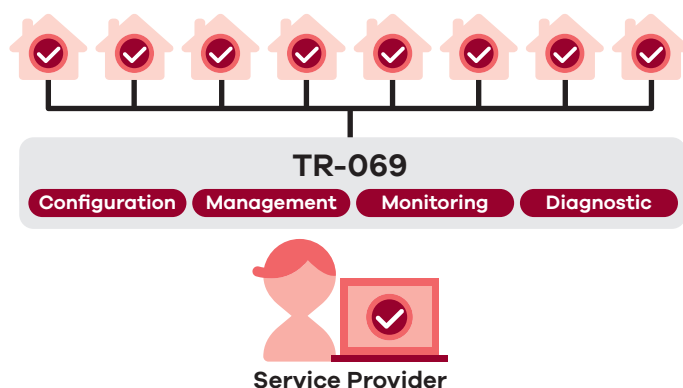

# Specifications

## System Specifications

### Wireless

- IEEE 802.11ac 5 GHz with up to 1.3 Gbps\* data rate
- IEEE 802.11n 2.4 GHz with up to 300 Mbps\* data rate
- Wireless Protected Setup (WPS)
- WEP data encryption (64/128 bit)
- WPA/WPA2, WPA-PSK/WPA2-PSK
- WiFi scheduling
- Multiple SSID (up to 4)

### VDSL and ADSL Compliance

- VDSL/ADSL2+ compliance
- VDSL2 (G.993.2), band plan Annex A (over POTS), Annex B (over ISDN)
- Support profile 8a, 8b, 8c, 8d, 17a
- VDSL1 (G.993.1)
- ADSL2+ (G.992.5) support Annex A, B, M
- ADSL2 (G.992.3) support Annex A, B, L, M
- ADSL (G.992.1) Annex A, B
- ANSI T1.413 issue 2
- G.INP (G.998.4)
- G.vector (G.993.5)

### VLAN/QoS

- Support flexible traffic classification
- 6-bit DiffServ Code Point (DSCP, RFC 2474)
- 802.1P 3-bit Class of Service (CoS)
- 802.1Q 12-bit VLAN ID

### Router/Bridge Features

- IEEE 802.1d transparent bridge
- PPP over Ethernet (RFC 2516)
- MAC encapsulation routing/IPoE
- Network Address Translation (NAT)/Network Address Port Translation (NAPT)
- NAT server (Port forwarding)
- DHCP client/server/relay
- DNS proxy/dynamic DNS
- Static route/policy routing
- IGMP v1, v2, v3
- IP protocol v6 (IPv6)

### Security

- Firewall
- Generic packet filter
- DoS attack prevention
- Parental control

### USB

- File sharing
- 3G backup

### Management

- Web GUI (HTTP/HTTPS)
- Command Line Interface (CLI)
- Firmware upgrade via HTTP/FTP/TR-069
- DSL forum TR-069/TR-098/TR-181/TR-111/TR-064
- 802.1ag Connectivity Fault Management (CFM)

## Hardware Specifications

### WAN

- One RJ-11 interface for VDSL
- One RJ-45 connector for Giga-Ethernet WAN port
- LAN: Four 10/100/1000M auto MDI/MDI-X RJ-45 ports

### Wireless

- Two internal antennas (2.4 GHz)
- Three internal antennas (5 GHz)

### Button

- Power jack
- Power on/off switch
- Reset button
- WPS on/off switch button
- WLAN on/off switch button
- One USB 2.0 host ports

### Status LEDs Indicators

- PWR/SYS, DSL, INTERNET, WAN, ETHERNET, WLAN, WPS, USB

### Power Consumption

- 12V/2A

## Physical Specifications

### VMG3925-B10C

### VMG3925-B30C

- Item dimensions (WxDxH): 180 x 145 x 29.8 mm (7.08" x 5.7" x 1.17")
- Item weight: 290.8g (0.64 lb.)
- Packing dimensions (WxDxH): 318 x 223 x 38 mm (12.51" x 8.77" x 1.49")
- Packing weight: 711.6g (1.57 lb.)

## Environmental Specifications

### Operating Environment

- Temperature: 0°C to 40°C (32°F to 104°F)
- Humidity: 10% to 90% RH (Non-condensing)

### Storage Environment

- Temperature: -30°C to 70°C (-22°F to 158°F)
- Humidity: 10% to 95% RH (Non-condensing)

## Certification


- CE

## Package Contents

- Wireless router
- Power adapter
- Ethernet cable
- DSL cable
- Quick start guide


\* The maximum wireless data transfer rate is derived from IEEE Standard 802.11 specifications. Actual data transfer rate will vary from network environment including: distance, network traffic, building site materials/construction, interference from other wireless devices, and other adverse conditions.

## Application Diagram

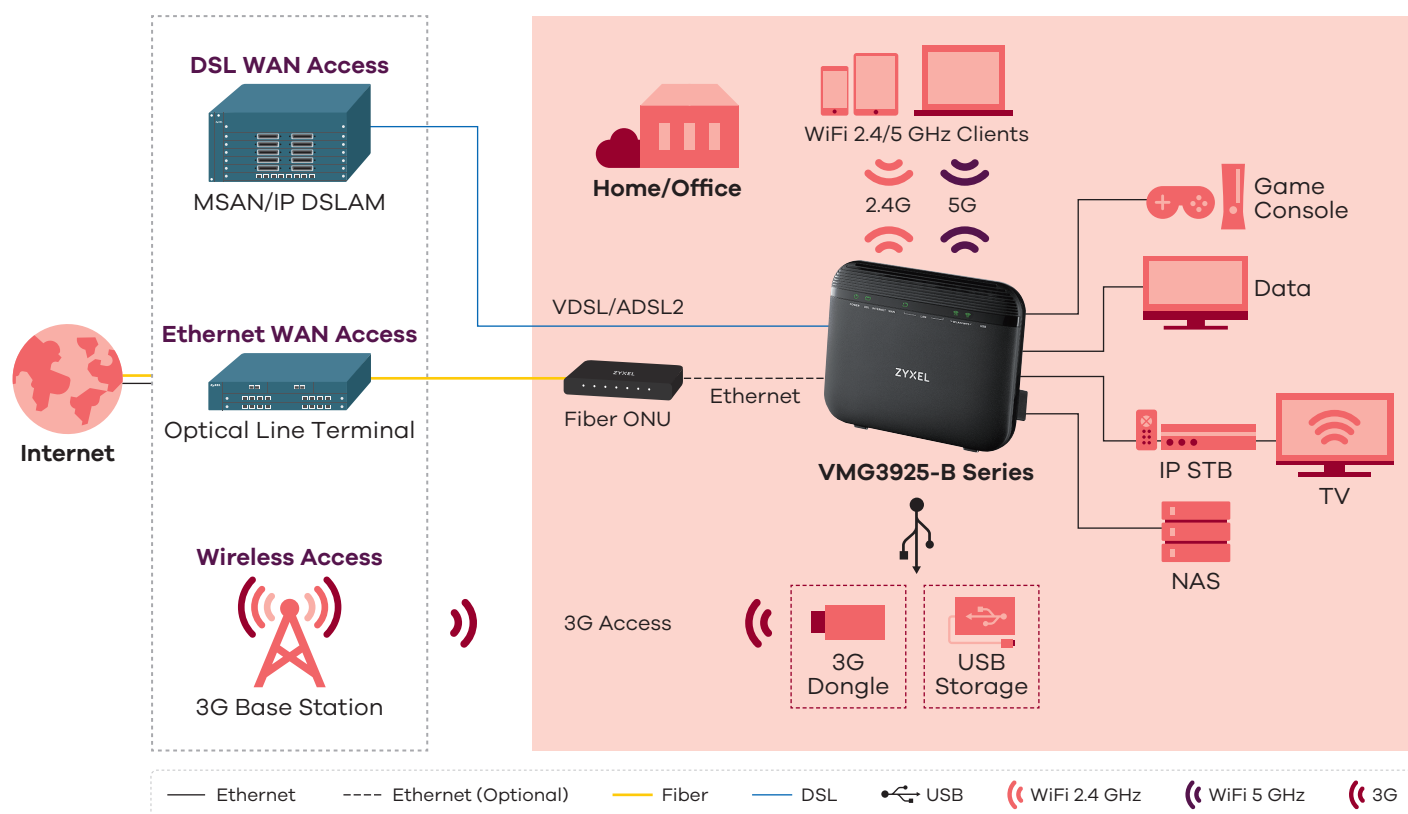


## Front Panel

VMG3925-B10C  
VMG3925-B30C

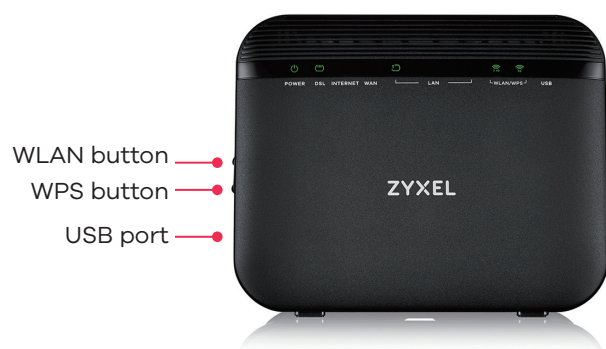

## Rear Panel

VMG3925-B10C  
VMG3925-B30C

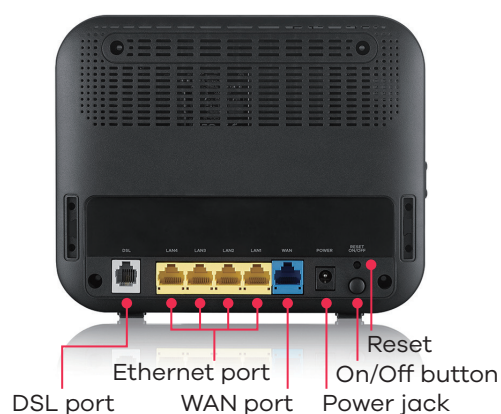

For more product information, visit us on the web at [www.zyxel.com](http://www.zyxel.com)

Copyright © 2017 Zyxel Communications Corp. All rights reserved. Zyxel, Zyxel logo are registered trademarks of Zyxel Communications Corp. All other brands, product names, or trademarks mentioned are the property of their respective owners. All specifications are subject to change without notice.

Datasheet VMG3925-B Series



5-100-01317016 11/17